
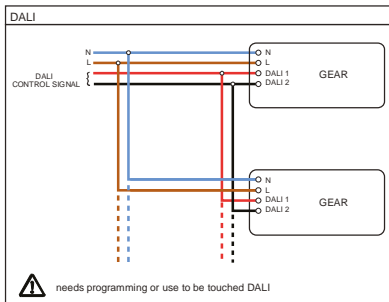


Smart surface tubed suspension 82 XL LED Dali GI

128427XX

VISUALIZATION WITH 'SMART CAKE'
 READ 'CAN BE USED WITH' FOR ALL
 OTHER USEFUL 'SMART' PRODUCTS
 'SMART 82 GE' FIXTURE NOT INCLUDED


Open 'SMART TUBED' cover

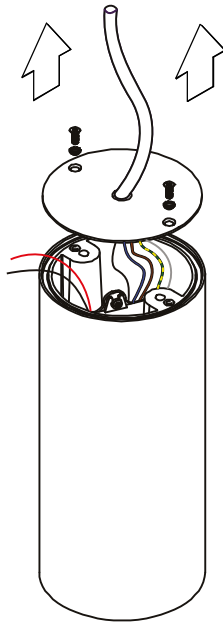



needs programming or use to be touched DALI



Disconnect fixture connectors
 and pull wires through opening





If necessary:
 Adjust cable length
 (Max 2m)

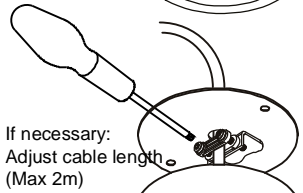

install : Twist clockwise
 uninstall : Twist counterclockwise

Connect fixture (+ dim wires) and
 close tube cover (re-use included
 toothed washers & screws)

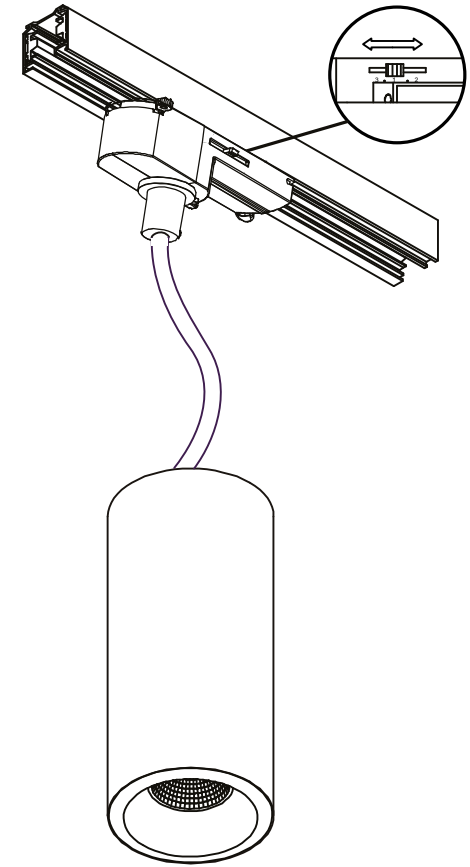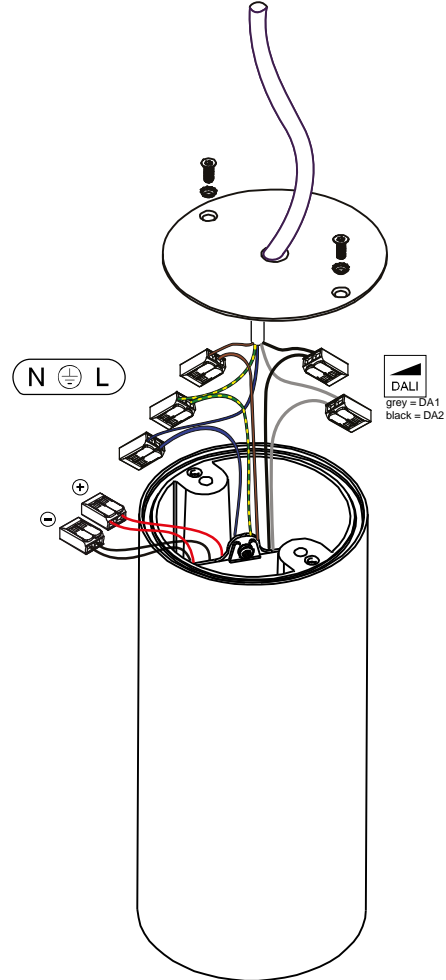

CAN BE USED WITH

- 12411XXX - Smart Cake 82 LED GE
- 12412XXX - Smart Cake 82 IP54 LED GE*
- 12441XXX - Smart Lotis 82 LED GE
- 12442XXX - Smart Lotis 82 IP54 LED GE*
- 12471XXX - Smart Kup 82 LED GE
- 12472XXX - Smart Kup 82 IP54 LED GE*

*Combined with 'Tube suspension' IP54 drops down to IP20

