

DEEP DOUBLE ADJ

19-May-2016

2.0 LED

LED 7/10W | 350-500mA | COB 3-step | excl. power supply
 CE IP20 960° C 0,3m 38° 35°/35° 355°

2200K | >80CRI | 315-465lm | 15Vf

white texture	112761W_
silver / grey	112761S_
black texture	112761B_

LIGHT COLOUR

2700K >90CRI 420-590lm 18Vf	3
3000K >90CRI 470-640lm 18Vf	5
1800-2850K >90CRI 320-440lm 18Vf	9

ALWAYS USE

for power supplies see our catalogue

2.0 PAR16

Max. 50W | GU10 | 220-240VAC | 50-60Hz
 CE IP20 960° C 0,9m 38° 35°/35° 355°

OPTIONAL: PAR16 LED GU10 6W | phase-cut dim : 2700K 390lm | 3000K 410lm
 PAR16 LED GU10 7W ambient white dim : 1800-3000K

white texture	112720W0
silver / grey	112720S0
black texture	112720B0

DEEP DOUBLE ADJ LED

DEEP DOUBLE ADJ PAR16

①




③



④



DIMENSIONS

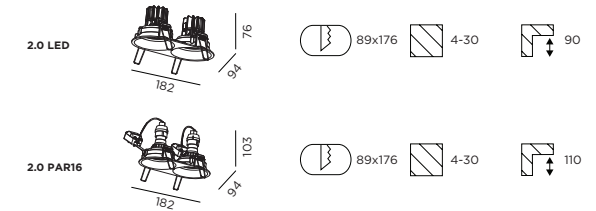


MOUNTING INSTRUCTION

- ① Make a hole in the ceiling according to the prescribed dimensions.


POWER CONNECTION

- ② SERIAL CONNECTION - for LED

Always use POWER SUPPLY according to the specifications of the LED-module




PARALLEL CONNECTION - for PAR16



- ③ Insert the lamp or LED module into the inner part of the DEEP Double ADJ
- ④ Click the inner part of the DEEP Double ADJ into the outer part

Hole dimension



FOR HALOGEN LAMPS:

1. The mounting height for the luminaire should be more than 2.5m.

2. Luminaires not suitable for covering with thermally insulating material.

3. Luminaires not suitable for direct mounting on normally flammable surfaces (suitable only for mounting on noncombustiblesurfaces)



WEVER & DUCRÉ
LIGHTING

www.weverducre.com

Wever & Duce bvba Kwadestraat 153 bus 2.1 8800 Roeselare

INSTALLATION
INSTRUCTIONS