


# FLOS

60.3102.14 Matte Black


## Three Phase Track Surface/Pendant 2000 mm

Designed by FLOS Architectural, 2013

Length: 2000 - Surface and suspension

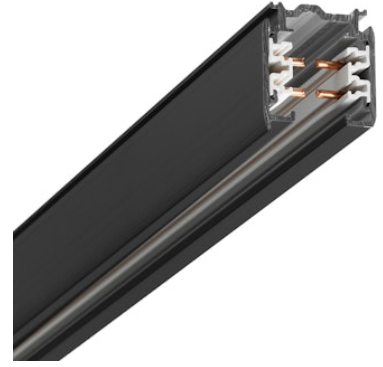

GLOBAL TRACK offers benefits for advanced installations: the main connectors are feedable and the feeding cable can be hidden under the elegant suspension accessories. GLOBAL TRACK lighting tracks are designed for easy surface mounting on ceilings and walls, or recessed mounting in suspended ceilings. Lighting tracks can be suspended at any desired height. Other advantages of the three-circuit system are its high loading capacity and the possibility of forming independent fixture groups in all three circuits. This permits illumination of the most demanding environments.



Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

### Main specifications

Mounting	Surface and suspension
Environments	Indoor dry location
Ilcos	No

### Physical

Colour	Matte Black
Trim	No
Length (mm)	2000
Net weight (kg)	1.60
IP internal	20
IP external	20

### Download

[Mounting instructions](#)

[↓ PDF](#)



## Electrical

Insulation class I

---

Emergency type No

## Accessories & Power Supply



OPTIONAL  
Accessory

60.3008.11

Attachment on track for steel cable suspension with M6 thread end



OPTIONAL  
Accessory

60.3008.14

Attachment on track for steel cable suspension with M6 thread end




OPTIONAL  
Accessory

Installation

60.3014.11

Suspension rod with 1 m rose, M6 thread



OPTIONAL  
Accessory

Installation

60.3014.14

Suspension rod with 1 m rose, M6 thread



OPTIONAL  
Accessory

Mounting

60.3054

Lead bending key




OPTIONAL  
Accessory

Installation

60.3097.11

1 m suspension rod with ceiling rose with m6 thread



OPTIONAL  
Accessory

Installation

60.3097.14

1 m suspension rod with ceiling rose with m6 thread



OPTIONAL  
Accessory

Installation

60.3016.11

Blind end



OPTIONAL  
Accessory

60.3016.12

Blind end



OPTIONAL  
Accessory

60.3016.14

Blind end



OPTIONAL  
Accessory

60.3018.11

Attachment on track for rod  
suspension M6 thread



OPTIONAL  
Accessory

Electrical

60.3018.14

Attachment on track for rod  
suspension M6 thread



OPTIONAL  
Accessory

Installation

60.3022.11

Recessed box for fix-point



OPTIONAL  
Accessory

Installation

60.3022.14

Recessed box for fix-point



OPTIONAL  
Accessory

Installation

60.3025.11

Bracket



OPTIONAL  
Accessory

Installation

60.3023.11

Fix-point



OPTIONAL  
Accessory

Installation

60.3023.14

Fix-point



OPTIONAL  
Accessory

Installation

60.3025.14

Bracket



OPTIONAL  
Accessory

Electrical

60.3028.11

Connector 90° Outside



OPTIONAL  
Accessory

Electrical

60.3028.14

Connector 90° Outside



OPTIONAL  
Accessory

Electrical

60.3029.11

Connector 90° Inside



OPTIONAL  
Accessory

Electrical

60.3029.14

Connector 90° Inside



OPTIONAL  
Accessory

Electrical

60.3036.11

Cross Coupling



OPTIONAL  
Accessory

Electrical

60.3036.14

Cross Coupling



OPTIONAL  
Accessory

Electrical

60.3037.11ADA

DALI Flexible connector



OPTIONAL  
Accessory

Electrical

60.3037.14ADA

DALI Flexible connector



OPTIONAL  
Accessory

Electrical

60.3037.29ADA

DALI Flexible connector



OPTIONAL  
Accessory

Electrical

60.3038.11

Live end right



OPTIONAL  
Accessory

Electrical

60.3038.12

Live end right



OPTIONAL  
Accessory

Electrical

60.3038.14

Live end right



OPTIONAL  
Accessory

Electrical

60.3039.11

Live end left



OPTIONAL  
Accessory

Electrical

60.3039.12

Live end left



OPTIONAL  
Accessory

Electrical

60.3039.14

Live end left



OPTIONAL  
Accessory

Electrical

60.3043.11

Mean connector



OPTIONAL  
Accessory

Electrical

60.3043.14

Mean connector



OPTIONAL  
Accessory

Electrical

60.3044.11

Straight connector



OPTIONAL  
Accessory

Electrical

60.3044.12

Straight connector



OPTIONAL  
Accessory

Electrical

60.3044.14

Straight connector



OPTIONAL  
Accessory

Electrical

60.3046.11

Corner adjustable connector



OPTIONAL  
Accessory

Electrical

60.3046.14

Corner adjustable connector



OPTIONAL  
Accessory

Installation

60.3047.11

Connector T - Inside Right



OPTIONAL  
Accessory

Installation

60.3047.14

Connector T - Inside Right



OPTIONAL  
Accessory

Installation

60.3048.11

Connector T - Inside Left



OPTIONAL  
Accessory

Installation

60.3048.14

Connector T - Inside Left



OPTIONAL  
Accessory

Installation

60.3049.11

Connector T - Outside Right



OPTIONAL  
Accessory

Installation

60.3049.14

Connector T - Outside Right



OPTIONAL  
Accessory

Installation

60.3051.11

Connector T - Outside Left



OPTIONAL  
Accessory

Installation

60.3051.14

Connector T - Outside Left





OPTIONAL  
Accessory

Installation

60.3057.11

Attachment on track for wire  
suspension



OPTIONAL  
Accessory

Installation

60.3090.11

Track cover strip L 3000 mm



OPTIONAL  
Accessory

Installation

60.3092.11

Power supply rose cover



OPTIONAL  
Accessory

Installation

60.3094.11

Ceiling fitting with rose



OPTIONAL  
Accessory

Installation

60.3094.14

Ceiling fitting with rose



OPTIONAL  
Accessory

60.3028.29

Connector 90° Outside



OPTIONAL  
Accessory

Electrical

60.3029.29

Connector 90° Inside



OPTIONAL  
Accessory

Electrical

60.3036.29

Cross Coupling



OPTIONAL  
Accessory

Electrical

60.3043.29

Mean connector



OPTIONAL  
Accessory

Electrical

60.3046.29

Corner adjustable connector



OPTIONAL  
Accessory

Installation

60.3047.29

Connector T - Inside Right



OPTIONAL  
Accessory

Installation

60.3048.29

Connector T - Inside Left



OPTIONAL  
Accessory

Installation

60.3051.29

Connector T - Outside Left



OPTIONAL  
Accessory

Installation

60.3023.29

Fix-point



OPTIONAL  
Accessory

Installation

60.3025.29

Bracket



OPTIONAL  
Accessory

Installation

60.3057.29

Attachment on track for wire  
suspension



OPTIONAL  
Accessory

Installation

60.3083.29

Complete wall support 70 mm



OPTIONAL  
Accessory

60.3093.29

Bracket for fixing track to wall or  
ceiling



OPTIONAL  
Accessory

Installation

60.3095.29

Lead-weighted wire 1500 mm



OPTIONAL  
Accessory

Installation

60.3096.29

Lead-weighted wire 3000 mm