






VENN

CEILING SURFACE

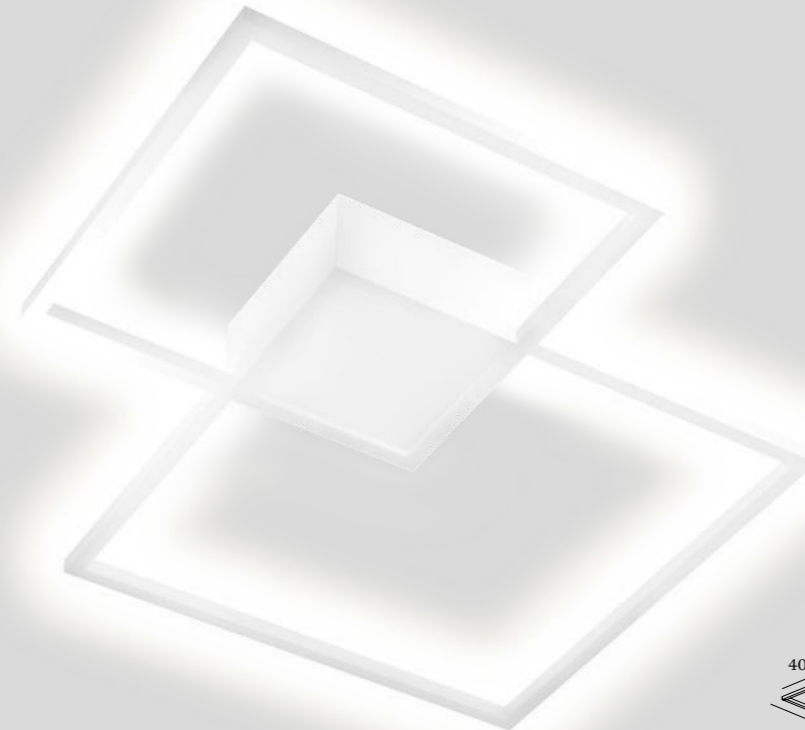

1.0

LED 38W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated
opal PMMA cover | indirect light

2.50kg IP20

2.0

LED 47W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated
opal PMMA cover | dir./indir. light

2.50kg IP20

CODE

149184W

149184B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	2100	>80	2
3000K	2250	>80	4

CODE

149284W

149284B



Light Colour Selection

	LUMEN	CRI	CODE
2700K	370/2100	>80	2
3000K	400/2250	>80	4



VENN


WALL SURFACE

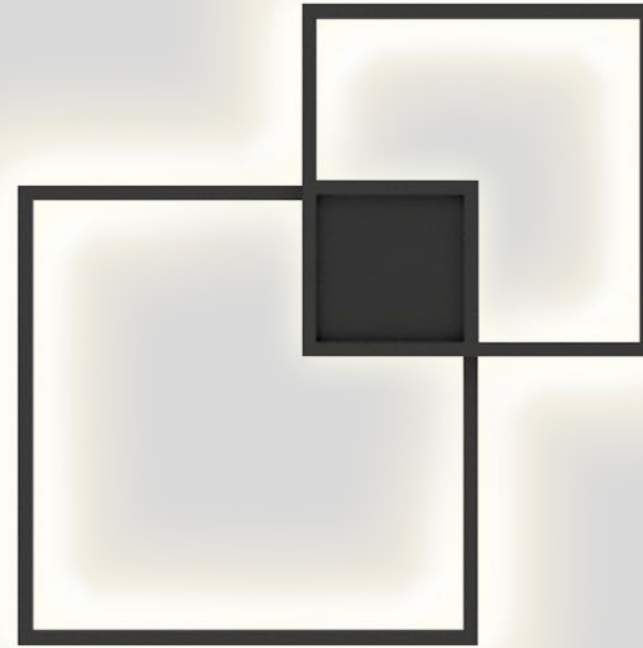

1.0

LED 38W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
opal PMMA cover | indirect

2.50kg IP20 \pm 0.3° \oplus



2.0

LED 47W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
opal PMMA cover | direct/indirect

2.50kg IP20 \pm 0.3° \oplus



As awarded by The Chicago Athenaeum:
Museum of Architecture and Design

CODE

149184W
149184B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	2100	>80	2
3000K	2250	>80	4

CODE

149284W
149284B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	370/2100	>80	2
3000K	400/2250	>80	4