

STICKS

Design by Arik Levy.

Reference

7348.

Application

Lighting Toolkit

Installation type

Surface

Description

Floor lamp with individual rod, producing ambient lighting effect or indirect light depending on rod rotation. Includes electric cable with plug to facilitate installation.

Diffuser

Polycarbonate diffuser

Materials

Stick: Aluminum

Base: Steel

Diffuser: Polycarbonate

Finish



7348-11 Black (NCS S 8500N)

Sketch



Electrical characteristics

OR

1 x LED STRIP 24V 35,2W

Total 35.2 W



VIBIA



Light source: 2700K CRI >90 4346 lm 123 lm/W

Driver included: CV - Constant Voltage 200-240V 50/60Hz

Electronic dimming PUSH

Technical characteristics

- Cord and plug

Physical characteristics

2 Box / 0.00 x 0.00 x 0.00 m. / Vol. 0.0198 m³ /

Gross weight 9.6 kg. / Net weight 7.6 kg.


Installation and assembly

Please, see the installation manual

Light distribution

Highlight

Lamp used to highlight a specific element.



Photometric data

Efficiency : 41.62 lm/W

Coordinate system : CG

Total flux : 1464.93 lm

Maximum value : 654.14 cd


Light position : C=0.00 G=0.00

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=2.50m

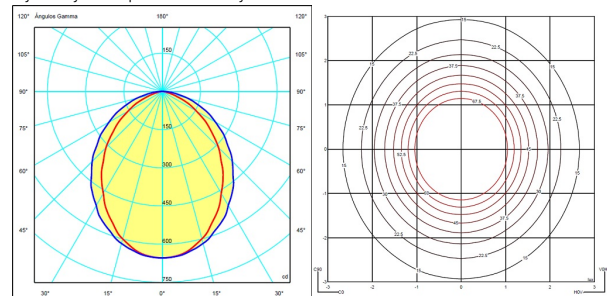

Certificates



