

DEEP ADJUST

19-May-2016

1.0 LED

LED 7/10W | 350-500mA | COB 3-step | excl. power supply
 CE P20 960°C 0,3m 38° 35°/35° 355°

white texture	112361W_
silver / grey	112361S_
gold	112361G_
black texture	112361B_

LIGHT COLOUR

2700K >90CRI 420-590lm 18Vf	3
3000K >90CRI 470-640lm 18Vf	5
1800-2850K >90CRI 320-440lm 18Vf	9

ALWAYS USE

for power supplies see our catalogue

1.0 MR16

QR-CBC51 max. 50W | GU5.3 | 12V | excl. transformer
 CE P20 960°C 0,9m 35°/35° 355°

white texture	112310W0
silver / grey	112310S0
black texture	112310B0

ALWAYS USE

for transformers see our catalogue


1.0 PAR16

PAR16 max. 50W | GU10 | 220-240VAC | 50-60Hz
 CE P20 960°C 0,9m 35°/35° 355°

white texture	112320W0
silver / grey	112320S0
black texture	112320B0

OPTIONAL

for PAR16 lamps see our catalogue

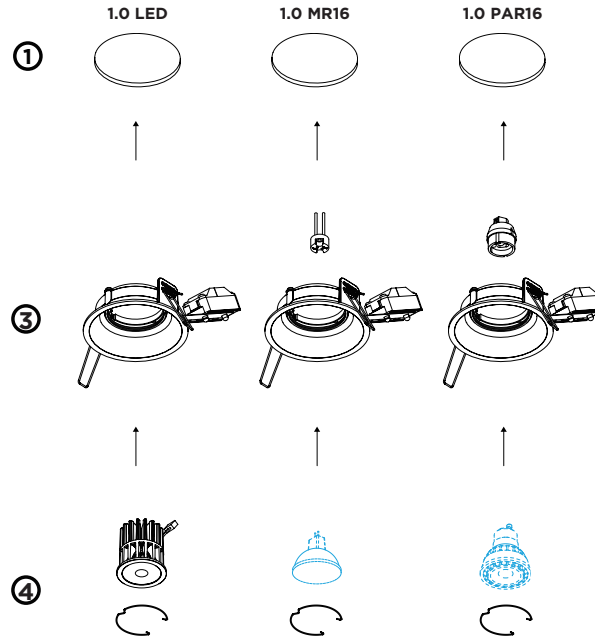

DIMENSIONS

1.0 LED	ø94x98	87	4-30	100
1.0 MR16	ø94x86	87	4-30	90
1.0 PAR16	ø94x98	87	4-30	100


MOUNTING INSTRUCTION

- 1 Make a hole in the ceiling according to the prescribed dimensions.

POWER CONNECTION


- 2 Connect the power supply.

Interior: STANDARD version
 serial connection for LED



- 3 Insert the fixture in the hole
- 4 For MR16 | PAR16
Place the lamp and fix with inner part of DEEP

SAFETY DISTANCE FOR HALOGEN LAMPS.....



WEVER & DUCRÉ
 LIGHTING

www.weverducre.com

Wever & Ducre bvba Kwadestraat 153 bus 2.1 8800 Roeselare

INSTALLATION
 INSTRUCTIONS