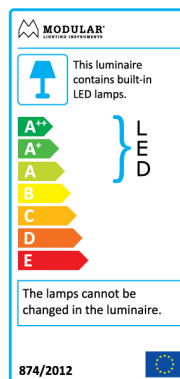# SMART CAKE

121
ø160

SMART CAKE 160 IP54 LED GE

Smart cake is part of the Smart family. This family's styling is based on our most popular iconic designs. Its gently sloping sides ensure a soft distribution of light. Since its introduction in 2010, Smart has become an extensive portfolio with a broad range of accessories. Concretely this means that the luminaires consist of a light source (LED, halogen), which can be combined with one of three trims to suit your needs. The new spotlights can be combined with Smart mask, Smart surface box or surface tubed to form the perfect solution for any interior. Choose a white, black or gold finishing. Also available in different sizes, fix and adjustable, IP version, …

Art. Nr. 13004009

SPECIFICATIONS

Lamp	1x LED Array					
Gear / Transfo	LED gear not incl.					
Cut-out size	ø 146 h 250					
Weight	0.98kg					
Min. Distance	0.1 m					
IP	IP54					
Glow Wire Test	960°					
CRI	90					
Power supply	500mA	700mA	900mA	1050mA	**1200mA**	1400mA
	32.1Vf	33.6Vf	34.2Vf	34.6Vf	**35Vf**	35.5Vf
Connected load	16W	23.5W	30.8W	36.3W	**42W**	49.7W
Lumen	1756lm	2391lm	2968lm	3432lm	**3855lm**	4438lm
Efficacy	110lm/W	102lm/W	96lm/W	95lm/W	**92lm/W**	89lm/W
UGR	15	16	17	18	**18**	19
Adjustability	Not Applicable					

This label is available in other languages:
http://supermodular.com/assets/TYPE2.pdf

LED · eco

	WARM WHITE 2700K / CRI 90+			WARM WHITE 3000K / CRI 90+			NEUTRAL WHITE 4000K / CRI 90+		
	SPOT 15°	MEDIUM 25°	FLOOD 40°	SPOT 15°	MEDIUM 25°	FLOOD 40°	SPOT 15°	MEDIUM 25°	FLOOD 40°
black struc	13004032	13004332	13004632	13004132	13004432	13004732	13004232	13004532	13004832
white struc	13004009	13004309	13004609	13004109	13004409	13004709	13004209	13004509	13004809

Modular reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly. Latest datasheet and documentation available on www.supermodular.com.

28/11/2016 - ©2016 Modular Lighting Instruments